

GRIFCO
POWERED BY myQ



SLIDE GATE OPENER MAINS VOLTAGE KIT GLD-GO



SUITABLE FOR SLIDE GATES UP TO 12 METRES



LIGHT COMMERCIAL / HEAVY RESIDENTIAL GATE OPENER

KEY FEATURES

SUITABLE FOR SLIDE GATES

Suited for Slide Gates up to 12 metres

MYQ CAPABLE

Opener is myQ capable for gates with an additional purchase of Safety IR Beams & myQ Gateway.¹

BATTERY BACKUP COMPATIBLE

Opener is Battery Backup compatible with additional purchase of Battery Backup accessory.²

Compliant to Australian and New Zealand Standard AS/NZS 60335.2.103



SMART



MYQ CAPABLE TECHNOLOGY lets users create schedules, monitor, receive alerts and control the gate opener away from home.¹



LCD DISPLAY for fast and intuitive programming setup.



SOFT-START AND SOFT-STOP for smooth operation.



SPEED ADJUSTMENT allows you to increase and decrease opening and closing gate speeds.



PEDESTRIAN MODE allows for customised gate opening access.

QUIET & RELIABLE



240V MAINS VOLTAGE



3-YEAR WARRANTY



IP44 WEATHER RESISTANT Ingress protection IP44 suitable for outdoor installation.



QUIET DC MOTOR eliminates noise and vibrations, providing smooth operation.



BATTERY BACKUP ensures access even when the power is out.²



SLIDING GATES UP TO 12 METRES

SAFE & SECURE



SECURITY+ 2.0[®] sends a new code with every remote click.



PREMIUM AUTOMATIC SAFETY REVERSE function will allow your gate to stop and reverse automatically if obstructed during opening or closing.



TIMER-TO-CLOSE automatically closes the gate after a pre-set amount of time.³



IMPROVED TRANSMITTER RANGE has up to 18% better range meaning you can start opening your gate sooner.⁴



AUTOMATIC FORCE SENSING monitors and adjusts the force needed to open your gate with each operation.



DISENGAGEMENT MECHANISM allows you to manually open the gate whenever needed.

Accessories Included



Four Button Remote Controls

Premium remotes to control up to 4 garage doors or gates. Each button can be programmed to Security+ and Security+2.0 devices.

E960G

Powerful Add-Ons



Gate myQ Connectivity Bundle

Add monitoring and control away from home. Includes myQ Gateway and The Outdoor Protector System (Safety IR Beams).

M828AU772



Battery Backup

Get in and out when the power's out with Battery Backup. Batteries fit within the housing of the opener.

MGBBU



Wireless Security Keypad

Convenient and safe access to open and close your gate without using a remote control or key.

E850G



E-Lock

Additional security with electric lock.

600024



Mag-Lock

Additional security with magnetic lock.

M61300AU



Slide Gate Stop

Additional security for slide gates.

002A2332



Rack

Additional 1m racking.

M6SRACK



Monitored Safety Beams

Provides additional safety to stop a closing gate upon non-contact detection of an obstruction.

GP515

1800 GRIFCO | grifco.com.au • grifco.co.nz

¹ Additional purchase of Grifco myQ Gateway and Safety IR Beams accessories required to enable myQ functionality. Visit grifco.com.au for further information. ² Additional purchase of Grifco Battery Backup accessory required to enable Battery Backup functionality. Visit grifco.com.au for further information. ³ Safety IR Beams must be installed to enable the use of Timer-to-Close. See User Guide for additional information. ⁴ When compared to other available products.



SLIDE GATE OPENER MAINS VOLTAGE KIT GLD-GO



SUITABLE FOR SLIDE GATES UP TO 12 METRES



LIGHT COMMERCIAL / HEAVY RESIDENTIAL GATE OPENER

Start with smart. Compatible with myQ²

Additional purchase of The Outdoor Protector System and myQ Gateway is required




FOR SLIDING GATES

- Monitor and control your gate away from home through the myQ App.
- Peace of mind knowing if gate is open or closed anywhere and any time.
- Receive real time alerts and notifications so you know when the gate is opened or closed by loved ones.
- Pre-set times to automatically close your gate at any time.
- See history records of your gate open and close periods.
- Protect your loved ones and belongings with The Outdoor Protector System (Safety IR Beams).
- Compatible myQ App available for smart devices including Apple Watch.

APP AVAILABLE ON:



TYPICAL INSTALLATION - SLIDE GATES

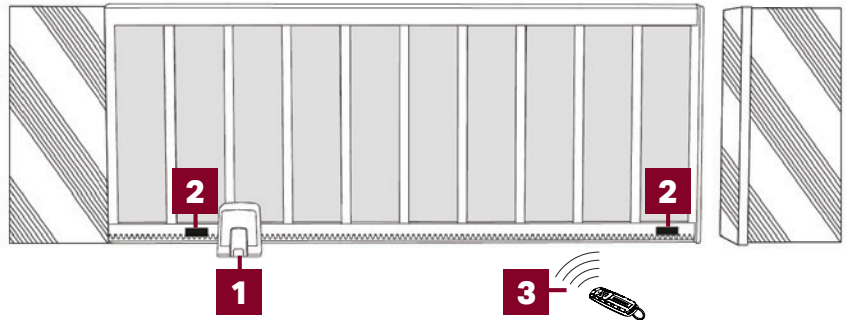

- 1. Gate Opener (GGS1000)
- 2. Limit Switch Brackets
- 3. Remote Control (E960G)
- Maximum Weight for single gate: 1000kg
- Maximum Width for single gate: 12m

SECURITY



SECURITY+ 2.0[®]

- Encrypted rolling code across multiple frequencies.
- Security+ 2.0[®] technology virtually eliminates interference.

SMART



RADIO

- Provides 2-way communication from gate openers and accessories.
- Receiver with 64 memory register.

Standard Specifications

- Main AC Supply: 220-240Vac; 50/60Hz
- Motor Voltage: 24 Vdc
- Input Power: 150 W
- Ambient Temperature Range: -20-+55°C
- Max peak pulling force: 22.5 Nm
- Radio frequency: 433.30, 433.92, 434.54 MHz with Security+ 2.0 technology
- Compatible with myQ Technology¹
- Gate Opener Capacity of up to 64 memory registers

¹ This feature requires monitored Safety IR Beams to be fitted. Linking your myQ account to partner may require an additional accessory purchase or subscription fee. Apple, the Apple logo, iPhone, and iPad are trademarks of Apple Inc., registered in the U.S. and other countries and regions. App Store is a service mark of Apple Inc. Google Play and the Google Play logo are trademarks of Google LLC. Smartphone not included.

GRIFCO[®]

AUSTRALIA

Chamberlain Australia Pty Ltd
PO Box 1446
North Ryde NSW 2113

www.grifco.com.au
1800 GRIFCO

Designed & Engineered in Australia
© Chamberlain Group 2021. All Rights Reserved. [™] Trademark of The Chamberlain Group, Inc. [®] Registered Trademark of the Chamberlain Group.

